



Power Supply Unit with Integrated Led Driver

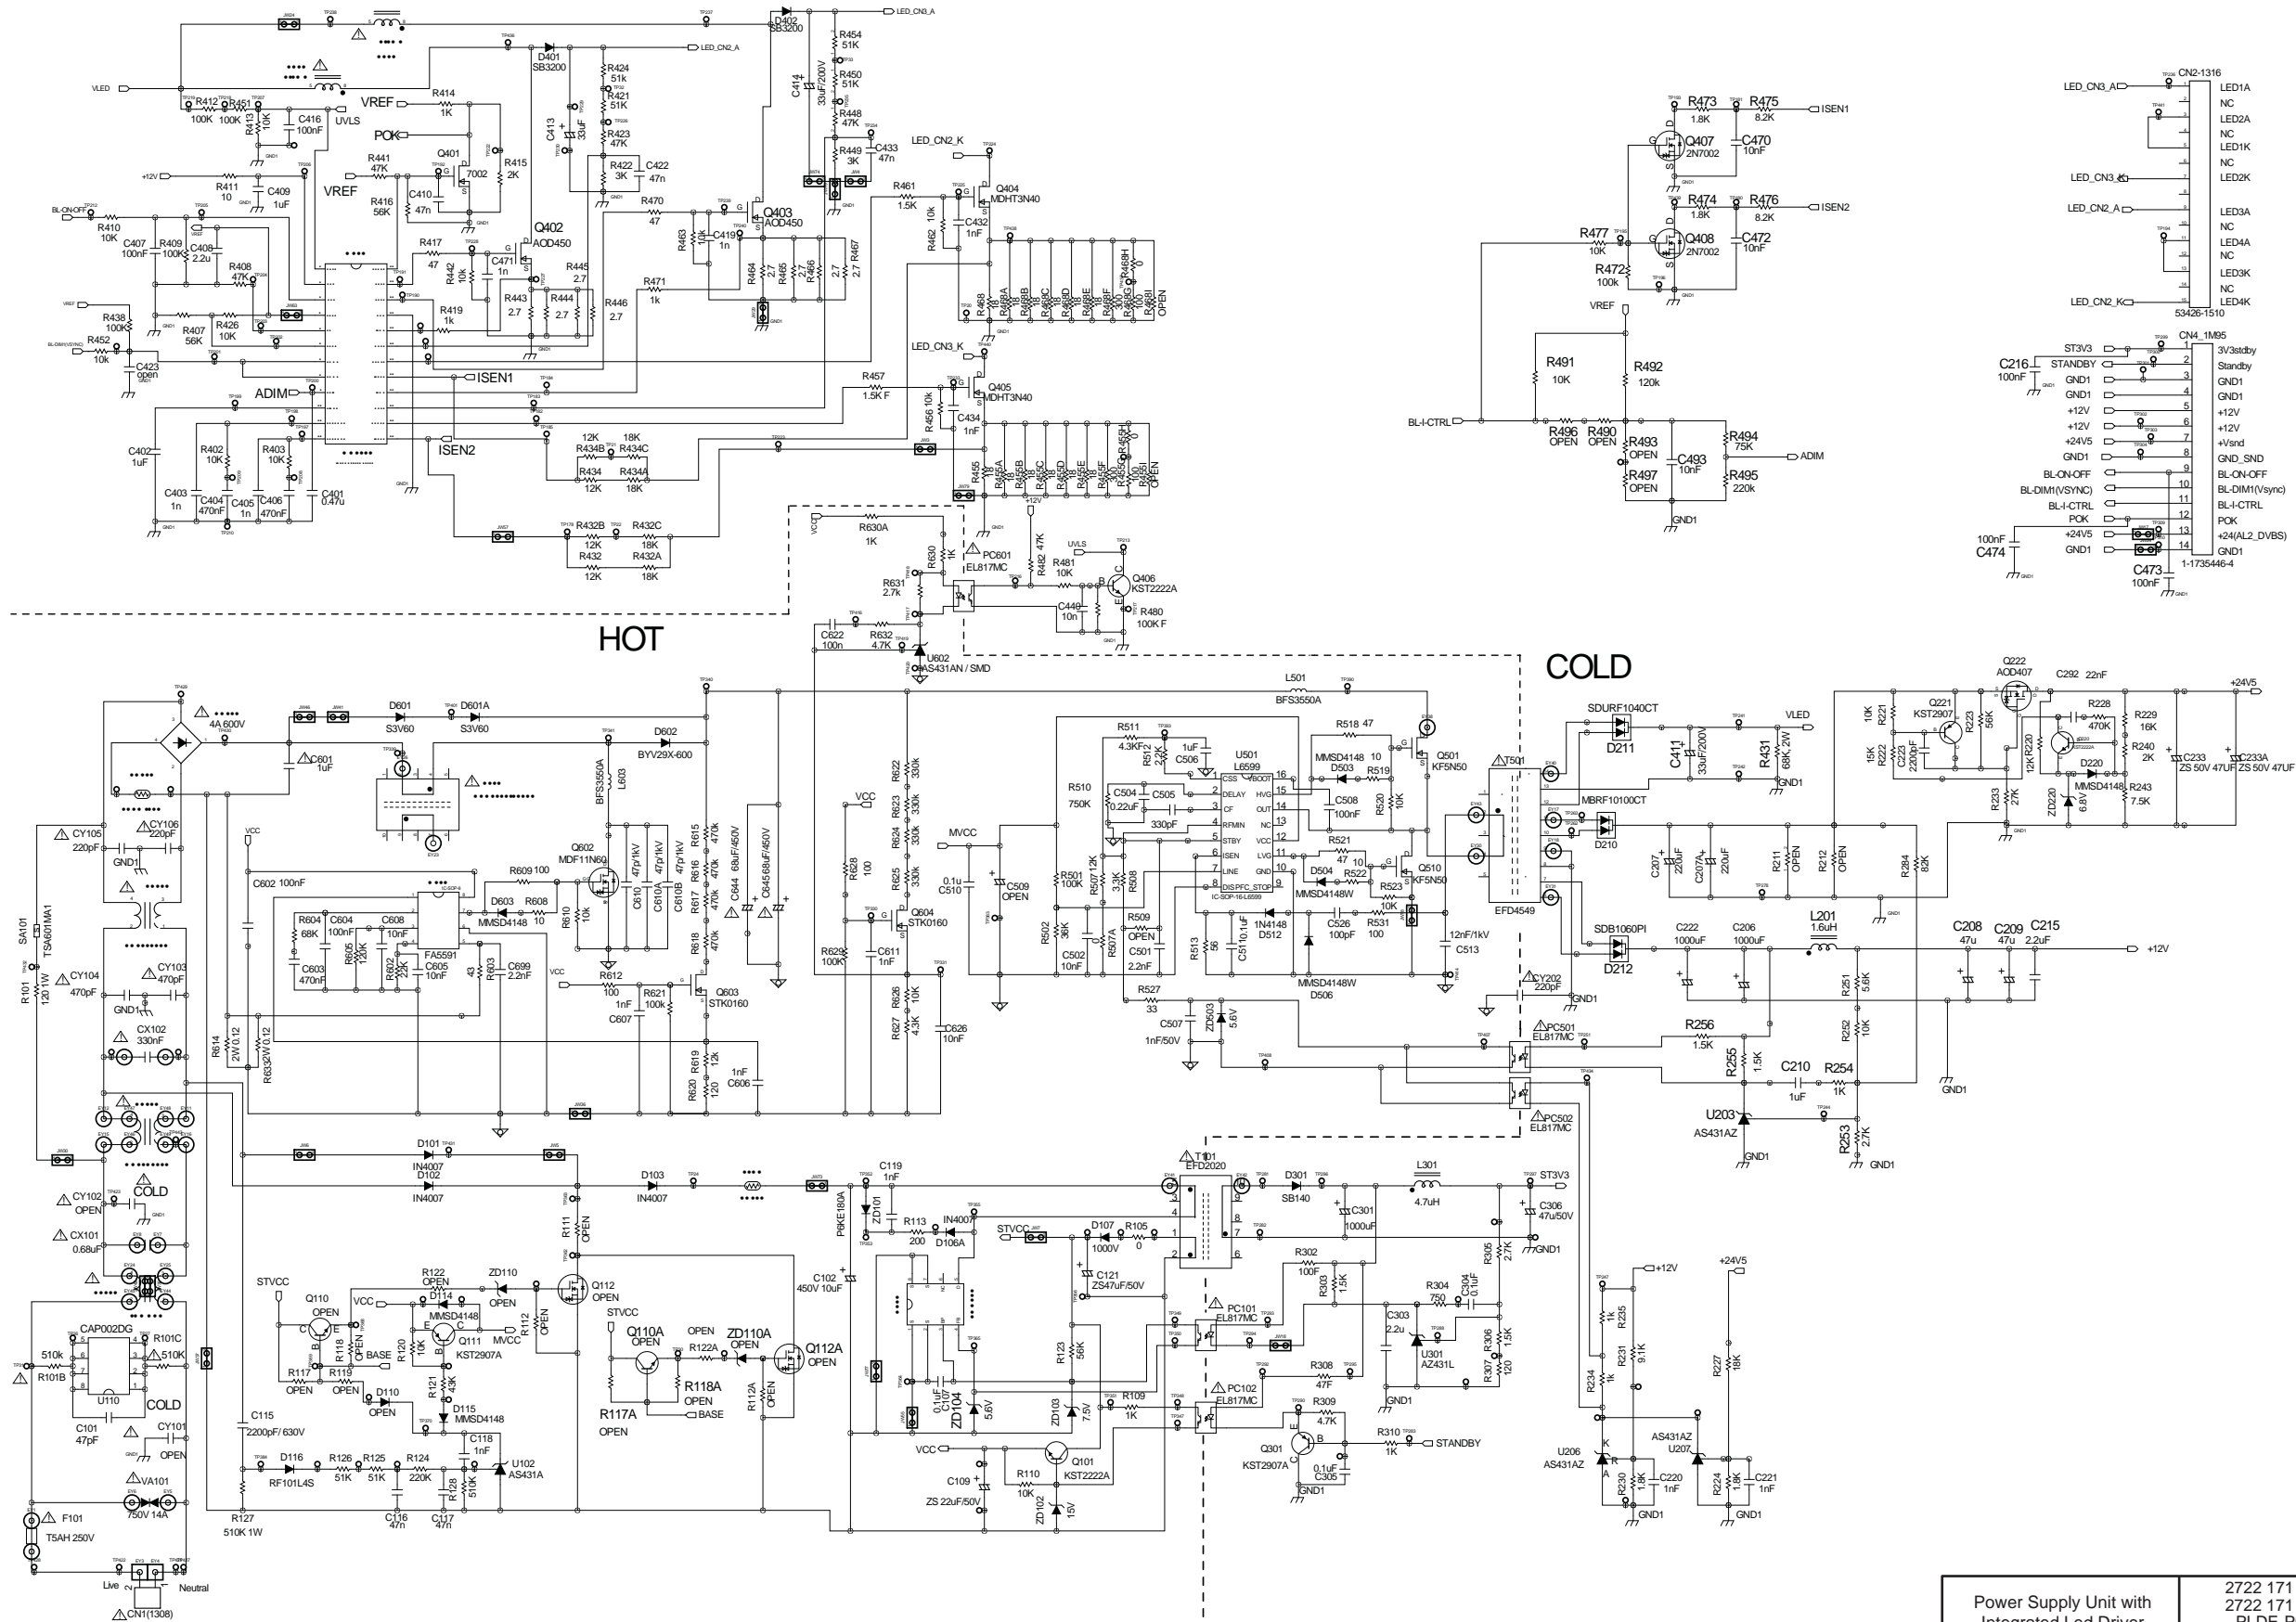



PLDE-P008A (GL-PSL40-2-Med)	MPR 1.0	EV27
PLDG-P010A (GL-BB PSL46-2-Med)	MPR 1.0	EV28
PCB P/N : 3PAGC10052A-R		


BAR CODE Date : 11.01.05
Rev 0.0

D M H I F A P T S Q R R T

CN2: 12V ---/250mA(P008A)
Model: PLDE-P008A
Input: 14V ---/250mA(P008A)
0.5A-1.5A(P008A)
3.3V --- 0.1A
12.3V --- 2.5A(P008A)
24V --- 3.0A(P008A)
0.25A
0.4A



Cross
Direction
L
SD

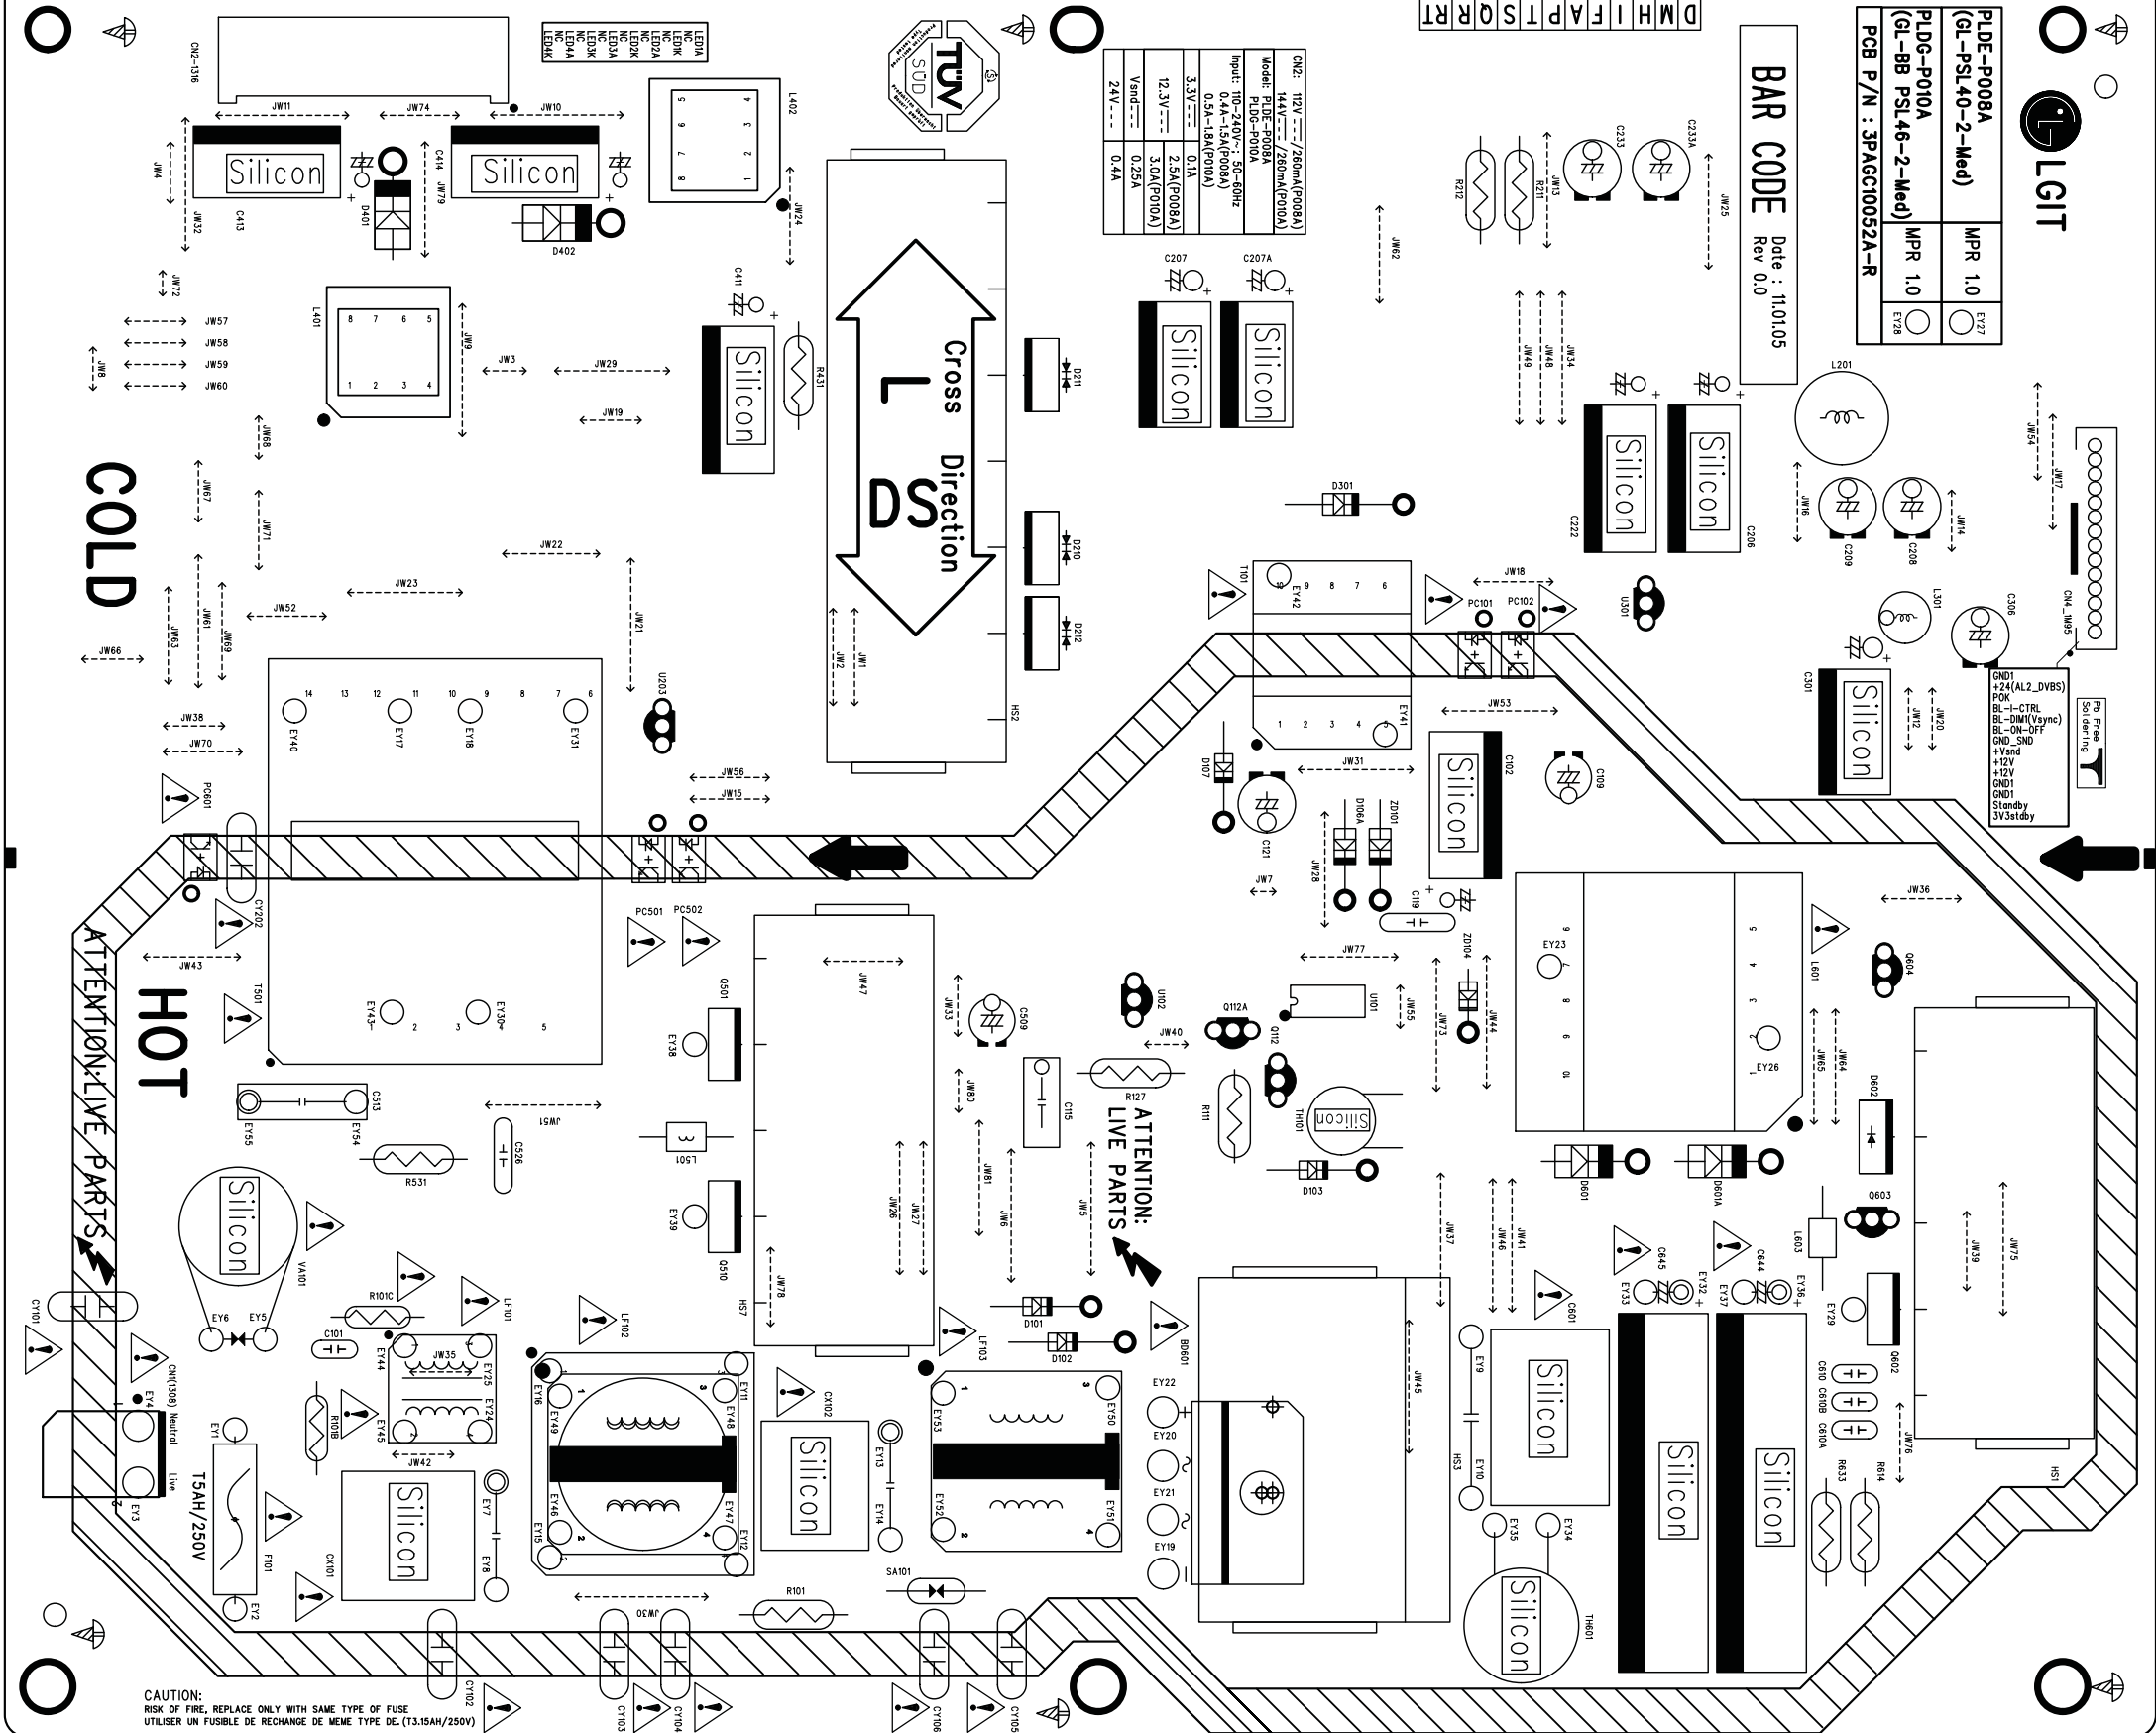

CAUTION:
RISK OF FIRE. REPLACE ONLY WITH SAME TYPE OF FUSE
UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE DE (T3.15AH/250V)